

Decking Maintenance Guidelines

SiOO:X finish

Light surface mould, dirt or discolouration.

Brush surface of dry timber vigorously with dry stiff bristle brush.

Application of **SiOO:x Surface Protection Deck (Step 2)** may be necessary if Surface Protection is removed

Optionally apply slow acting neutral pH mouldicide to dry timber.

Clean every 12 months minimum or when needed with SiOO:x Maintenance Wash. Apply with soft brush, rinse with water.

After one year or following summer, clean with **SiOO:x Maintenance Wash** and apply one coat of **SiOO:x Surface Protection Deck (Step 2)** to dry timber.

After approximately up to 8 years:
Clean with **SiOO:x Prewash** then apply full treatment – two coats **SiOO:x Wood Protection Deck (Step 1)** + one coat **SiOO:x Surface Protection Deck (Step 2)** to clean, dry timber. More often than 8 years in difficult areas by not cupper pressure treated fir.


Repairing damage
For minor surface damage apply **SiOO:x Surface Protection Deck (Step 2)**.

Where raw timber has been exposed apply full treatment: **SiOO:x Wood Protection Deck (Step 1)** + **SiOO:x Surface Protection Deck (Step 2)** to the exposed areas ensuring clean, dry timber.

Heavy persistent mould, dirt, or stubborn stains.

Clean with **SiOO:x Prewash** and a soft brush, rinse with water. Wait until wood is dry and then apply one coat of **SiOO:x Surface Protection Deck (Step 2)**.

Optionally apply slow acting neutral pH mouldicide to dry timber.

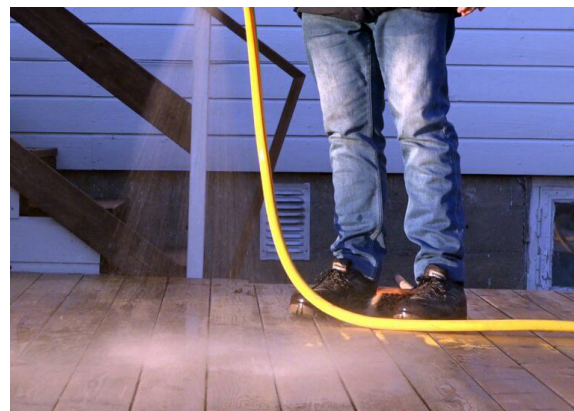

MORE INFO HERE: sioox.com/en//how-to-do-it/
Re-coat intervals are a indicative only and will depend on climatic conditions, construction and wood species.