



Vulcan® Panelling



New Growth Feature Timbers

○ Overview


Vulcan Panelling is created from thermally modified New Zealand plantation timber and engineered with a patented vertical grain construction for superior weathering characteristics.

The thermal modification process and vertical grain structure means Vulcan Panelling has enhanced stability, reduced resin content, is a beautiful homogeneous brown colour, and is naturally durable so does not require any chemical preservatives.


○ Wood Species

Thermally Modified Radiata Pine (Pinus Radiata).

○ Standard Profiles



TG9 - 140x10 Smooth face up (135mm cover)




TG9 - 140x10 V-Groove face up (135mm cover)



TG9 - 180x10 Smooth face up (175mm cover)



TG9 - 180x10 V-Groove face up (175mm cover)



TG17 - 90x17 (84mm cover)

Profiles with smooth faces.

Sanding required prior to coating. Please contact Abodo for recommended coating options.

Other custom profiles are available but may be subject to minimum order quantities.

○ Lengths

3.6-4.8m.

Lengths are subject to availability at order time.

Random length orders may contain lengths 2.4m and longer or fixed lengths at Abodo's option.

ABODO



Vulcan® Panelling

- **Compatibility** Vulcan has little or no corrosiveness on metals (equivalent to untreated softwood) and can be placed in contact with most building materials Normal PVA, PU, MUF glues and RF resins can be used. Always check compatibility with glue manufacturer and test prior to use.

- **Coating** Vulcan will take most stains, penetrating oils, paints, polyurethanes and varnishes well, though uptake of coating is generally higher than normal. Faces must be thoroughly sanded with 120 grit sand paper prior to application of coating. For exterior applications with limited weather exposure only e.g. soffits, coat to the front face and edges with an exterior coating system. For interior applications such as ceilings and walls, film forming or high solids coatings e.g. hard wax oil, acrylic or polyurethane are recommended only. Please contact Abodo for further advice on specific application.

- **Certification** Forest Stewardship Council® (FSC®) Certified FSC MIX, FSC-C010962, SGS-COC-004944.


- Product Handling**
 - Timber and accessories must be kept clean, dry under cover, well ventilated and out of the weather prior to installation. For internal use please allow time for boards to acclimatise prior to fixing.
 - Timber must be stored horizontally on bearers at least 150mm off the ground.
 - Extra care must be taken during installation so as not to damage the factory finish of the boards.
 - Wear dust mask, eye protection and use dust extraction when cutting timber.
 - Timber may disposed of as mulch, landfill or burnt.

- Fixing Overview**
 - Allow boards to acclimatise on site prior to installation.
 - Lining should not be installed if higher than 16% MC.
 - Fix boards onto battens spaced at maximum 600mm centres.
 - Apply a bead of exterior polyurethane construction adhesive to each batten.
 - Secret nail boards at a 45 degree angle into the tongue with one 32mm x 1.8mm stainless steel nails (hand driven or mechanically driven) per batten.
 - Face fix final board and punch nail head.
 - Fixings at ends of boards must be pre-drilled at least 25mm back before applying fastener.
 - Mitre join butt ends over battens only face fixing with one nail through the join, use adhesive sealant in the gap.
 - Use finishing mouldings where lining meets cladding, doors or windows.
 - All end grains and notches must be sealed using Abodo's Protector – End Seal, or equivalent water repellent preservative.
 - Faces must be thoroughly sanded with 120 grit sand paper prior to application of coating.



Vulcan® Panelling


Fixing Details

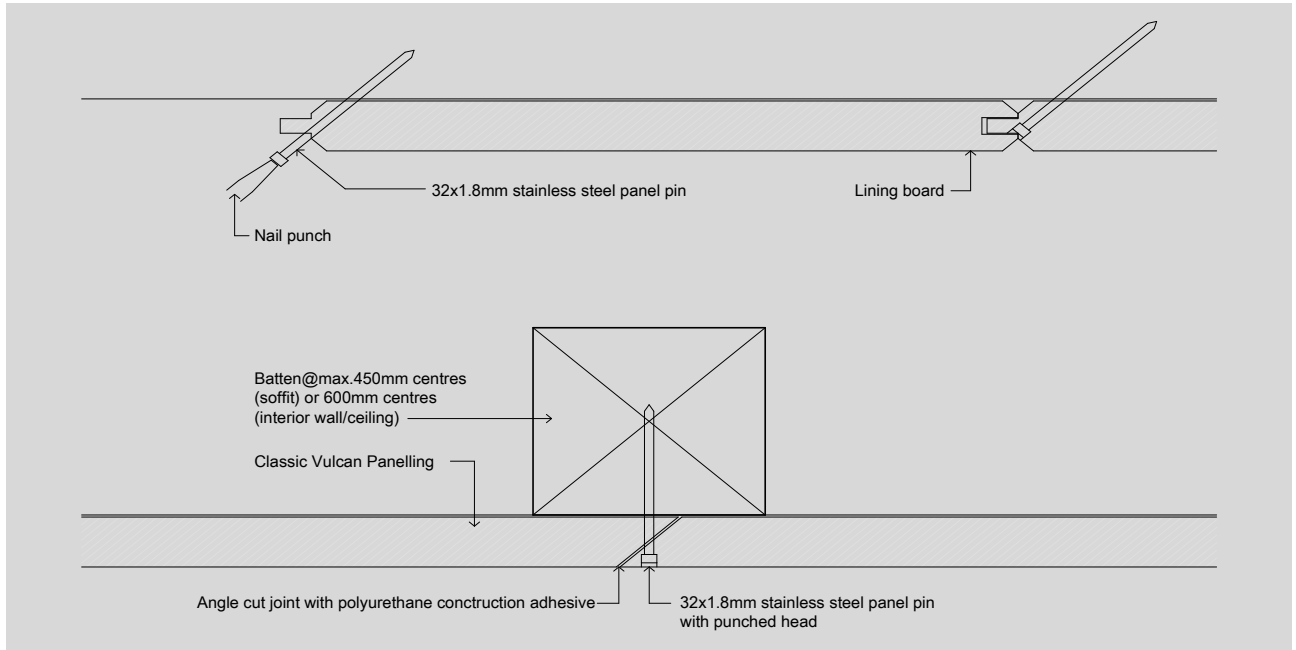

Maintenance

- Wash down as needed with gentle detergent, warm water and soft cloth.
- Re-coat as required to maintain the integrity of the surface coating.

Mouldings

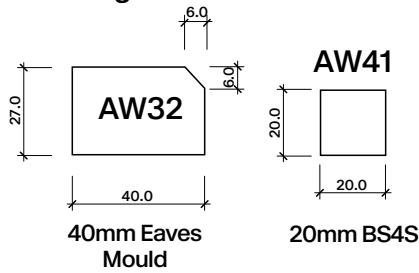

Mouldings supplied as standard with light bandsawn faces.

New Growth Feature Timbers

ABODO

info@abodowood.co.uk abodowood.co.uk