

## Vulcan Decking



### Overview

Vulcan Decking is created from thermally modified softwood timber, sourced from rapidly renewable New Zealand plantation timber and then treated with an organic preservative system that includes a water repellent for superior durability.


The thermal modification process means Vulcan Decking has enhanced stability, reduced resin content and is a beautiful homogeneous brown colour.

---

Wood species: Thermally Modified Radiata Pine (Pinus Radiata).

---

Profiles: Reeded face to top.



DK16V 142x27

---

Sizes: Width x Thickness (mm)  
142x27mm

---

Lengths: 2.1 - 4.8m\*

\*Product is supplied as standard in 'mixed length 2.1m and longer' or otherwise lengths at Abodo's option. Specified fixed lengths may be available but are subject to conditions including minimum quantity, price premium and availability. Please check with distributor prior to placement of order.

---

### Product specifications

Name: Abodo Vulcan Decking.

Quality: **Premium Grade**/Graded to the reeded face with mainly clear sections, but with some defects including knots and resin pockets allowed up to 1/3rd of the board width. Reverse face with defects permitted according to Standard Grade.

Substrate colour: Chocolate brown (timber will weather to grey unless a pigmented coating is applied and maintained).

Durability: Thermally Modified to INTENZ Thermowood 230 degrees schedule.

Treated with OPX azole-based preservation system. Durability Class 1 (EN350), H3 (AS1604) and suitable for Use Class 3 (EN335).

Resistant to attack from wood boring insects and termites.

Bushfire rating: BAL 12.5 and 19 - All AS 3959 Required Applications.

Construction: Solid, mixed grain orientation.

## Vulcan Decking

### Product specifications

Compatibility:	Vulcan has little or no corrosiveness on most metals and can be placed in contact with most building materials Normal PVA, PU, MUF glues and RF resins can be used.
Coating:	Accepts most regular coatings including water and oil borne stains and paints. Preparation of timber by pre-weathering and scrubbing down with timber cleaner such as Rejuvenator prior to coating is recommended. Specialist penetrating deck stains are recommended. Always test prior to application. Note: Pigmented stains may be subject to wear/tracking marks and more regular recoating. If maintenance is of concern a clear non-pigmented penetrating oil coating is recommended allowing the timber to silver off naturally.
Expected dimensional change in surface*	Width expansion approx 3%, length expansion approx 0.25%, thickness expansion approx 1.5%. Variation may occur between boards.  (*Indicative tangential movement from 'dry' 12%MC to 'wet' fiber saturation approx 25%MC).
Moisture content:	Approx. 16% MC (at time of despatch from factory).
Average density:	Approx 420 kg/m <sup>3</sup> .
Hardness:	Low (2.5kN Janka).
Slip resistance:	0.59 - P4 (AS/NZS 4586:2013) - for travel perpendicular to reeded face.
Expected service life:	25 years or more when installed and maintained according to manufacturer's recommendations.
Warranty:	25 years against fungal decay and termite attack – terms and conditions apply.
Environmental Product Declaration (EPD) registration number:	S-P-01543
Sustainability:	FSC®-certified mixed, No.: SGS-COC-004944 LBC – Red List Free.

### Product handling

- Prior to installation, keep decking boards dry and out of the weather or under plastic wrap, elevated 100mm off the ground on bearers.
- During installation wear safety glasses, gloves, safety footwear and ear protection as appropriate.
- When cutting, do not breathe in wood dust- always wear a dust mask.
- Preservative treated Vulcan should be disposed of in lined landfill or burned in an approved industrial furnace only.
- Consult with a design professional, engineer or architect when building a deck with elevated or critical structural elements.
- Adhere to local building code and construction standards in all cases.

### Fixing overview

- When installing decking take reasonable precautions to protect the surface from damage during installation e.g. by work boots - use plywood protective sheets or similar.
- Vulcan Decking must be used in it's final shape and form only. Re-machining and/or putting into other applications than decking is not permitted unless pre-approved by Abodo.
- High quality stainless steel fixings must be used in all cases.
- Pre-drilling of deck boards is necessary at board ends only. Drill hole through deck board and into joist using a drill bit with approx 1/3 less thickness than the fastener.
- Bevel and seal cut ends and exposed timber with a water repellent, preservative eg: Metalex Wood Protector, Protim Solignum XJ™ Clear Timber Protective or equivalent.
- As this is dry timber, some expansion of the product must be accounted for during installation and in service.
- Fix decking methodically in rows, starting from one edge of the deck and working your way to the other edge row by row.
- It is recommended to fix deck boards with ribbed face up, as this helps to mask surface cracking due to weathering.

## Vulcan Decking


### Fixing overview

- Optionally for better long term performance and to maintain colour, apply penetrating decking oil or stain. Leave the timber to weather a few weeks and wash down prior to coating according to manufacturers instructions. Note: Pigmented stains may be subject to wear/ tracking marks and more regular re-coating. If maintenance is of concern a clear non-pigmented penetrating oil coating is recommended allowing the timber to silver off naturally.
- Sub floor and joists should be of appropriate durability class material and the design should allow for adequate airflow around underside of boards, with minimum **300mm clearance above the ground**. Damp substrates should be water proofed with suitable membrane and allow minimum 5 degree fall to prevent rising dampness.

### Fixing recommendations

142x27mm

- Space joists at 450mm centres maximum.
- Use two 5.5 x60mm self drilling self-countersink head screws per joist. Nail fixing is not recommended.
- Position fixings approx 18mm from board edge and 12mm from ends.
- Allow **6mm** gap between board edges and 1-2mm spacing at butt ends.

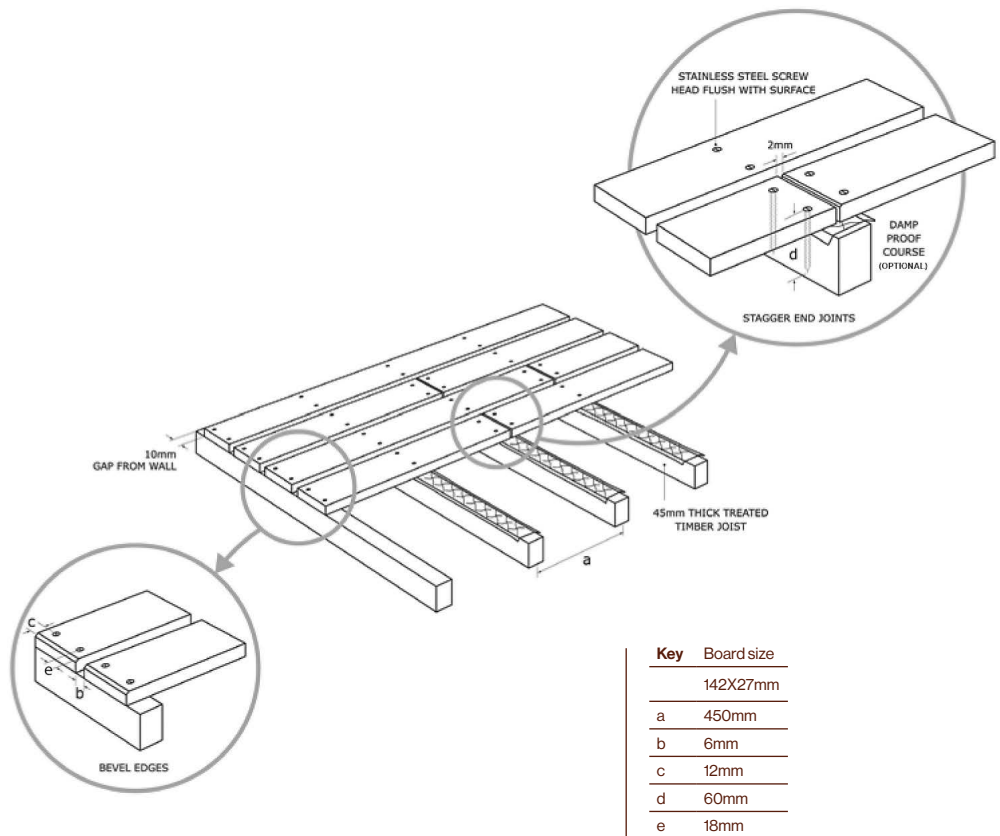

### Maintenance

- Wash down regularly (at least every 6 months) with mild detergent, warm water and soft brush.
- All wood will go grey after extended exposure to the weather. To maintain colour use a brown pigmented deck stain and re-apply on a regular basis. Note: Pigmented stains may be subject to wear/ tracking marks and more regular re-coating.
- Surface cracking or 'checking' may occur after exposure to the weather, this can be reduced by using a quality decking stain and by installing boards with ribbed face up.

## Vulcan Decking

### Maintenance

- Re-apply coating as required.
- Mould growth will occur on timber, especially in high humidity conditions, for heavily soiled or mouldy areas use Abodo Rejuvenator, similar timber cleaner or oxygenating cleaner then apply long acting mould inhibitor such as Resene Deep Clean.

---

### Accessories

Abodo Stainless Steel Decking Screw 5.5 x 60mm:



**E** [info@abodo.com.au](mailto:info@abodo.com.au)

**W** [abodo.com.au](http://abodo.com.au)